

## Torque wrenches Service MANOSKOP® (N·m)

### 730 Quick



Product no. **50184004**  
GTIN **4018754292660**  
Model **730/4 QUICK**



**Label.** MANOSKOP® torque wrench 730 Quick 8-40N·m 9 x 12 mm L. 223mm

#### Properties.

- clicking type with dual stop signal
- no reset to "0" required
- the measuring element is only under load when a force is applied.
- mount for interchangeable insert tools
- with QuickRelease safety lock
- non-slip adjuster with thumb recess for quick torque adjustment
- fine, tapered pointers
- counter-clockwise tightening by turning the insert tool over
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 4%**



## Product highlights.



### Rapid adjustment.


Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



### Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.


## Technologies and features.



### QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.

## Technical drawing.

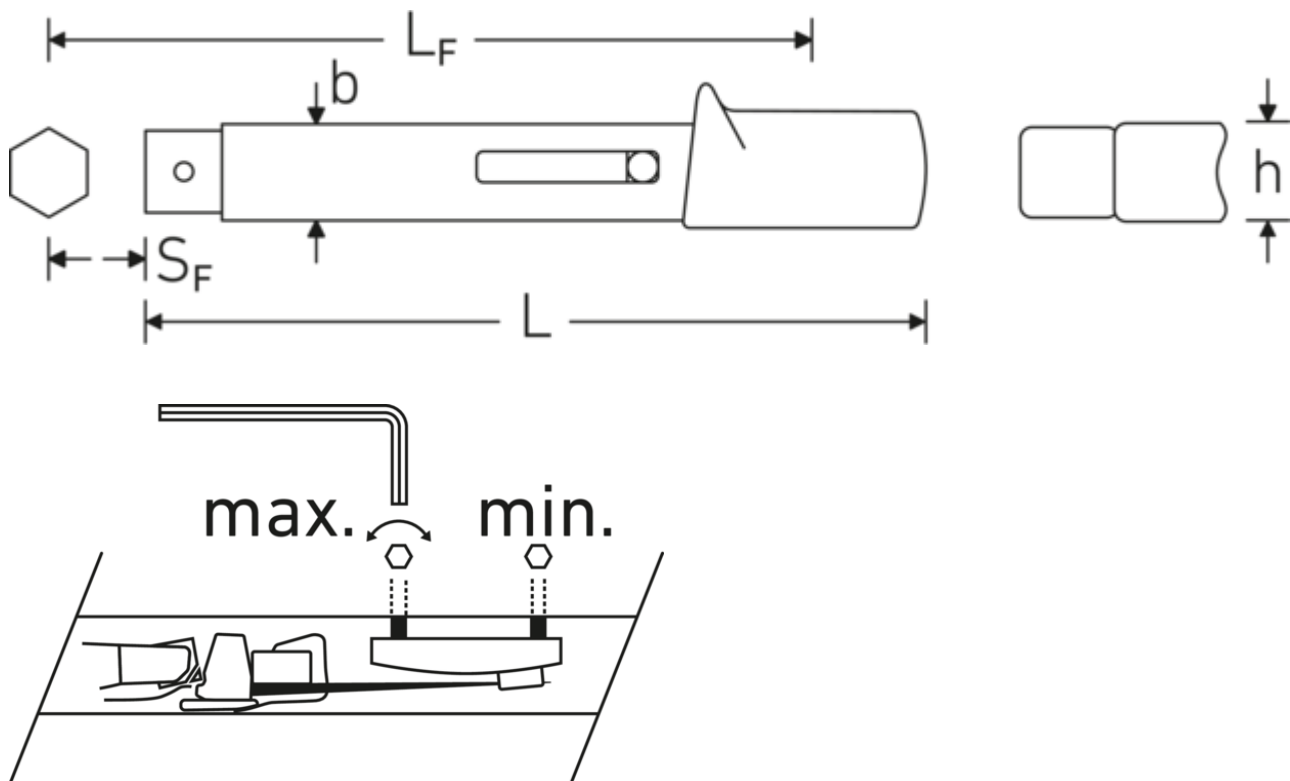

## Technical attributes.

Size	4
Anzeigeabweichung	± 4 %
Tool holder size [internal square]	9 x 12 mm
Measuring range N·m	8-40 N·m
Scale division N·m	1 N·m
Length mm (L)	223 mm
Width mm (b)	27,5 mm
Height mm (h)	23,6 mm
LF	200,8 mm
SF	17,5 mm

## Logistics data.

Product no.	50184004
GTIN	4018754292660
Weight (g)	395 g
Volume (packaged, dm <sup>3</sup> )	0.7865 dm <sup>3</sup>
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Depth mm (IFS)	260
Width mm (IFS)	55
Height mm (IFS)	55
Weight (gross, kg)	0,474
Weight PAP (kg)	0,000
Weight PVC (kg)	0,062
Length (packaged, mm)	260
Width (packaged, mm)	55
Height (packaging, mm)	55

## GTIN.



## Accessories (for).



58253004  
QuickRelease ratchet  
insert tool

## Spare part(s), spare part(s) for.



92057436  
Handle

**STAHLWILLE Eduard Wille GmbH**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal