

Torque wrenches Service MANOSKOP®

730R Quick



Product no. **96504002**
GTIN **4018754311354**
Model **730R/2 QUICK**



Label.

Torque wrench Service MANOSKOP® 730R Quick 4-20N·m 3/8" L. 255mm

Properties.

- clicking type with dual stop signal
- no reset to "0" required, as the measuring element is only under load when a force is applied
- mount for interchangeable insert tools
- with QuickRelease safety lock
- Quick adjustment thanks to easy-to-operate locking lever in handle
- non-slip adjuster with thumb recess for quick torque adjustment
- double scale N·m/ft·lb or N·m/in·lb
- also available on request as a N·m only version without dual scale
- counter-clockwise tightening by turning the insert tools over
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 4%**

Product highlights.



Rapid adjustment.

Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



PRODUCT IMAGE
IN PROGRESS

Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.



Technologies and features.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.

Technical drawing.

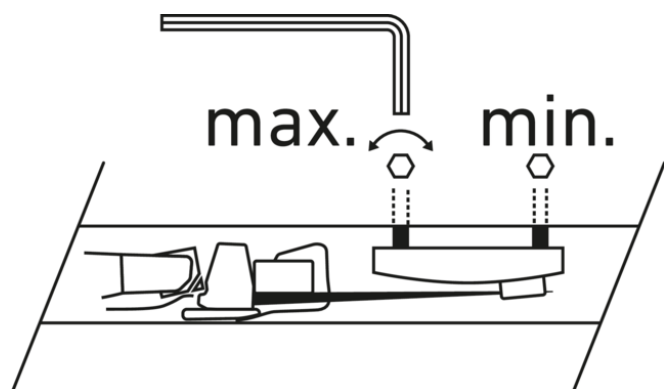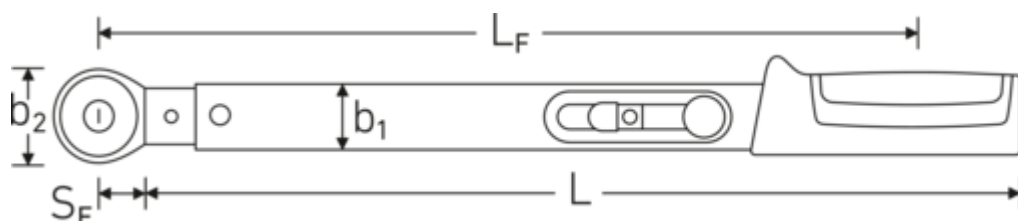

Technical attributes.

Size	2
Anzeigeabweichung	± 4 %
Tool holder size [internal square]	9 x 12 mm

Logistics data.

Product no.	96504002
GTIN	4018754311354
Weight (g)	455 g
Volume (packaged, dm3)	0.771375 dm3

Measuring range N·m	4-20 N·m	Packing standard	1
Measuring range ft·lb	- ft·lb	WEEE/ElektroG	nicht ear-pflichtig
Scale division N·m	0,5 N·m	Customs tariff no.	82041100
External square drive (inch)	3/8	Country of origin AWR	GERMANY
Length mm (L)	255 mm	Region of origin	Nordrhein-Westfalen
b1	55 mm	Depth mm (IFS)	255
b2	33 mm	Width mm (IFS)	55
Height mm (h)	55 mm	Height mm (IFS)	55
DIN	DIN EN ISO 6789-2:2017	Weight (gross, kg)	0,540
LF	157,2 mm	Weight PAP (kg)	0,000
SF	17,5 mm	Weight PVC (kg)	0,006
		Length (packaged, mm)	255
		Width (packaged, mm)	55
		Height (packaging, mm)	55

Parts list.



50184002
MANOSKOP® torque
wrench

GTIN.



Images.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal