

Ratchet ring insert tools 717

717

Product no. 58170112
GTIN 4018754348411
Model 717 12



Label.

Ratchet ring insert tools 12mm Tool holder 9 x 12

Properties.

- bi-hex
- for torque wrenches with interchangeable insert system
- reversible
- HPQ® high-performance steel, black gunmetal finish

Benefits.

Robust insert tool for torque wrench with 9 x 12 mm insert system.

The flush-mounted changeover lever for clockwise and counterclockwise rotation prevents unintentional switching.

Made of HPQ® wear-resistant high-performance steel with a black gunmetal finish for durability and corrosion protection.

The integrated ratchet with 72 teeth makes it possible to ratchet at an angle of just 5°.

The flat design makes it easier to work in tight spaces.

Product highlights.



Fine-tooth ring ratchet.

The high level of accuracy is achieved by flat transducers and a special technology for immediate data processing directly in the transducer. Thanks to an integrated measurement amplifier, the testing device is resistant to bending moments and transverse forces.



For confined spaces.

This ring ratchet insert adaptor enables precise work with a working angle of just 5°. Thanks to its slim design, it is particularly well-suited for use in tight and hard-to-reach areas where larger movements are not possible.



Safe switching.

The high level of accuracy is achieved by flat transducers and a special technology for immediate data processing directly in the transducer. Thanks to an integrated measurement amplifier, the testing device is resistant to bending moments and transverse forces.



Safe and durable.

The high level of accuracy is achieved by flat transducers and a special technology for immediate data processing directly in the transducer. Thanks to an integrated measurement amplifier, the testing device is resistant to bending moments and transverse forces.



Technologies and features.



High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.

Technical drawing.

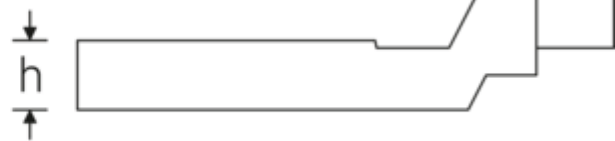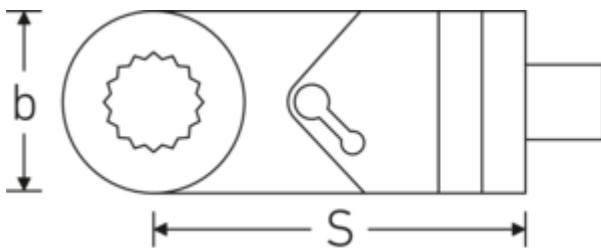

Technical attributes.

| | |
|------------------------------------|-----------|
| Size [mm] | 12 mm |
| Tool holder size [internal square] | 9 x 12 mm |
| Width mm (b) | 25 mm |
| Height mm (h) | 9,1 mm |

Logistics data.

| | |
|------------------------|---------------|
| Product no. | 58170112 |
| GTIN | 4018754348411 |
| Weight (g) | 90 g |
| Volume (packaged, dm3) | 0.055692 dm3 |
| Packing standard | 1 |

| | |
|------------------------|-----------------------------|
| Number of teeth | 72 |
| Working angle | 5 ° |
| Alloy | HPQ® high performance steel |
| max. torque | 89 N·m |
| S | 42 mm |
| Surface | black oxidized |

| | |
|-------------------------------|------------------------|
| WEEE/ElektroG | nicht ear-pflichtig |
| Customs tariff no. | 82042000 |
| Country of origin AWR | CHINA |
| Region of origin | Ausländischer Ursprung |
| Depth mm (IFS) | 70 |
| Width mm (IFS) | 25 |
| Height mm (IFS) | 19 |
| Weight (gross, kg) | 0,092 |
| Weight PAP (kg) | 0,000 |
| Weight PVC (kg) | 0,002 |
| Length (packaged, mm) | 78 |
| Width (packaged, mm) | 34 |
| Height (packaging, mm) | 21 |

GTIN.



Images.



DAS RICHTIGE ANZIEHDREHMOMENT ERREICHEN

auch bei Einsatz von Steckwerkzeugen mit veränderten Stichtmaßen.

Bei richtigen und falschen Einstellungen des Anziehdrehmoments kann es zu Schäden an den Bauteilen kommen. Um dies zu vermeiden, ist es wichtig, dass die richtigen Einstellungen für das jeweilige Bauteil getroffen werden. Bitte beachten Sie, dass die Einstellungen für das jeweilige Bauteil in der Bedienungsanleitung angegeben sind.

Achtung: Prüfen Sie die Einstellungen des Anziehdrehmoments vor dem Einsatz. Ein falsches Anziehdrehmoment kann zu Schäden an den Bauteilen führen.

$$M_{\text{Anz}} = \frac{M_{\text{Nenn}} \cdot L_{\text{eff}}}{L_{\text{Sticht}}}$$

M_{Anz} = Anziehdrehmoment in Nm
 M_{Nenn} = Nennmoment in Nm
 L_{eff} = effektive Stichtlänge in mm
 L_{Sticht} = Stichtlänge in mm





STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal