

Torque wrenches Standard MANOSKOP®

721Nf



Product no. **96502001**
GTIN **4018754081936**
Model **721NF/100**



Label.

MANOSKOP® torque wrench 721Nf 200-1000N·m 3/4" L. 820mm

Properties.

- clicking type with dual stop signal
- Quick adjustment thanks to easy-to-operate locking lever in handle
- with permanently installed ratchet
- 30 teeth
- dual scale N·m/ft·lb
- anti-clockwise tightening through a reversible square
- all sensitive parts are protected by the robust tubular steel housing in alu-U-profile
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- delivered in a textile bag
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 4%**

Product highlights.




PRODUCT IMAGE
IN PROGRESS

Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



Low-wear bending beam system


Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

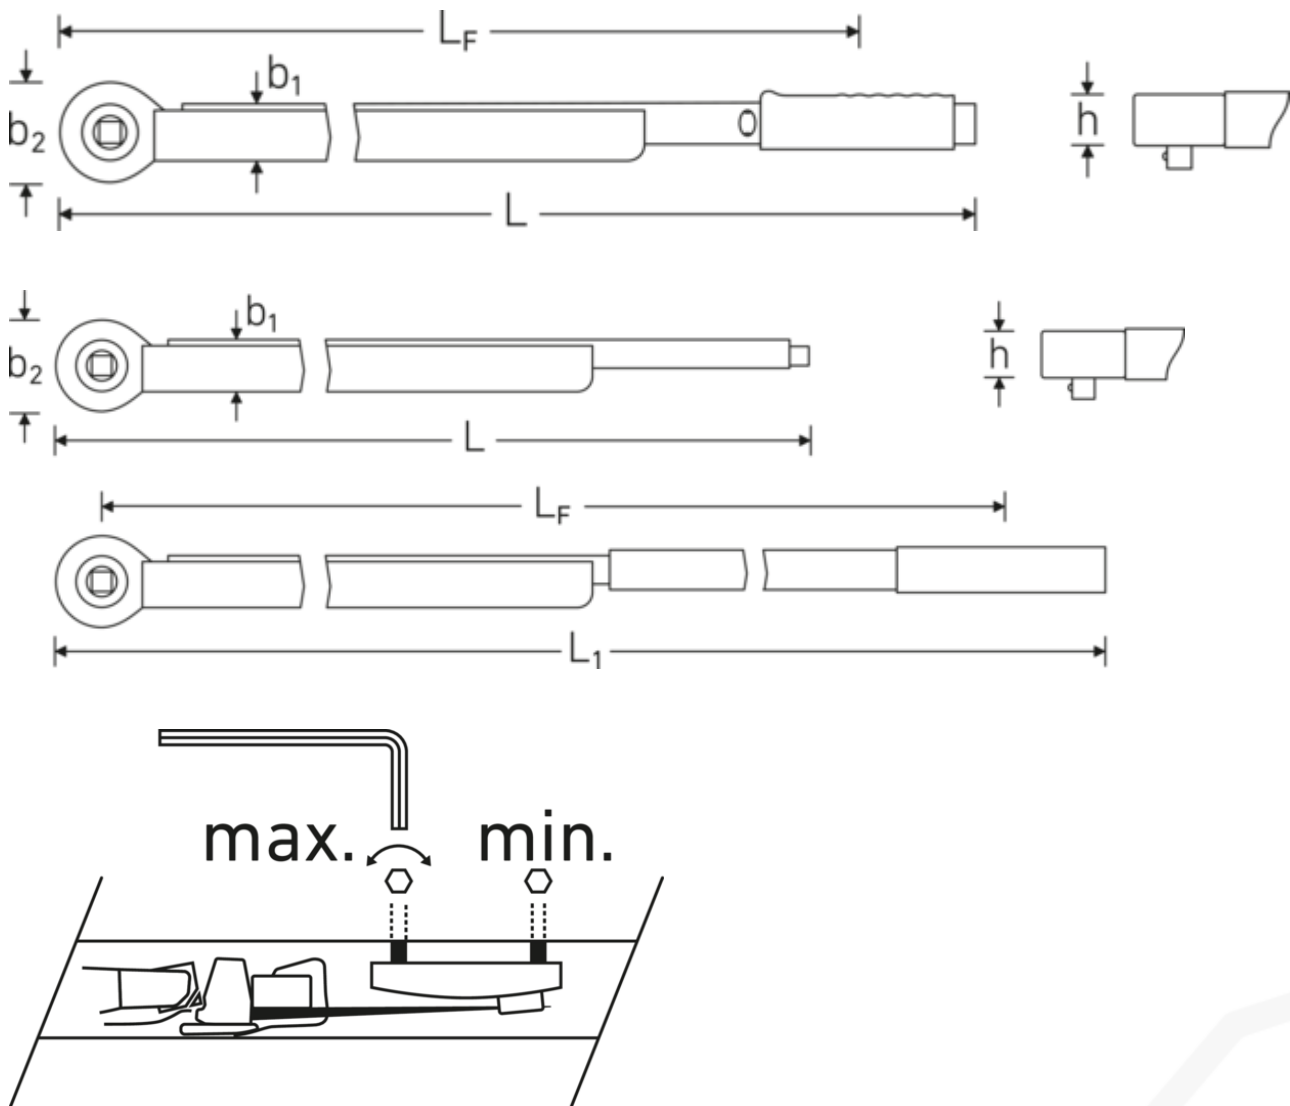

Technical attributes.

| | |
|------------------------------|---------------|
| Size | 100 |
| Anzeigeabweichung | $\pm 4 \%$ |
| Measuring range N·m | 200-1000 N·m |
| Measuring range ft·lb | 150-725 ft·lb |
| MA N·m | 200 N·m |
| Nominal value N·m | 1000 N·m |
| Scale division N·m | 25 N·m |
| Scale division ft·lb | 25 ft·lb |
| External square drive (inch) | 3/4 |
| Length mm (L) | 820 mm |
| L1 | 1503,5 mm |
| b1 | 46,5 mm |

Logistics data.

| | |
|-------------------------------------|-----------------------|
| Product no. | 96502001 |
| GTIN | 4018754081936 |
| Weight (g) | 7010 g |
| Volume (packaged, dm ³) | 13.44 dm ³ |
| Packing standard | 1 |
| WEEE/ElektroG | nicht ear-pflichtig |
| Customs tariff no. | 82041100 |
| Country of origin AWR | GERMANY |
| Region of origin | Nordrhein-Westfalen |
| Depth mm (IFS) | 960 |
| Width mm (IFS) | 200 |
| Height mm (IFS) | 70 |

| | | | |
|----------------------|---------------------------|-------------------------------|-------|
| b2 | 76 mm | Weight (gross, kg) | 8,000 |
| Height mm (h) | 42 mm | Weight PAP (kg) | 0,005 |
| DIN | DIN EN ISO 6789-2:2017 | Weight PVC (kg) | 0,005 |
| LF | 1365,5 mm | Length (packaged, mm) | 960 |
| | | Width (packaged, mm) | 200 |
| | | Height (packaging, mm) | 70 |

Parts list.



58180001
Handle

GTIN.



Spare part(s), spare part(s) for.



59191080
Spare parts set for
ratchet

Images.





STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal