



Fine-tooth ratchet insert adapter

735

Product no. **58250065**
GTIN **4018754208784**
Model **735/40HD**

Label. Fine-tooth ratchet insert adapter Drive 3/4 Tool holder 14 x 18

Benefits.

Robust and smooth-running ratchet insert adapter for torque wrenches with a square drive.

The reversible mechanism allows quick direction changes without having to change the plug - optimal for frequently changing screw directions.

Made from durable Chrome Alloy Steel and additionally chrome-plated for maximum durability and wear protection.

60 teeth enable a working angle of only 6° - for efficient working in confined spaces, e.g. in the engine compartment.

The integrated ball lock ensures that the socket wrench remains in place even at high torques.

Product highlights.



Quick change of direction.

Our ratchet insert adaptor is equipped with a finely tuned switch plate for lightning-fast direction change. Unlike conventional lever mechanisms, the rotating wheel prevents accidental adjustment - even in confined spaces or when working with gloves.



PRODUCT IMAGE
IN PROGRESS

Full precision in a minimum of space.

The high-quality fine toothing with 60 teeth allows a working angle of only 6°. This allows you to work in a controlled and efficient manner - even where there is hardly any space for tool movement. Ideal for precise bolted joints in tight installation conditions.



PRODUCT IMAGE
IN PROGRESS

High work safety.



The square drive allows the ratchet to be quickly and easily adapted to different applications and situations. The integrated ball lock ensures that the socket wrench remains securely in place even at high torques.



PRODUCT IMAGE
IN PROGRESS

High quality.

Technical drawing.

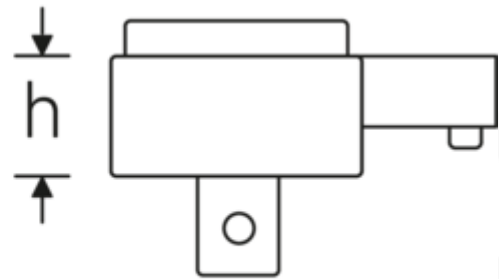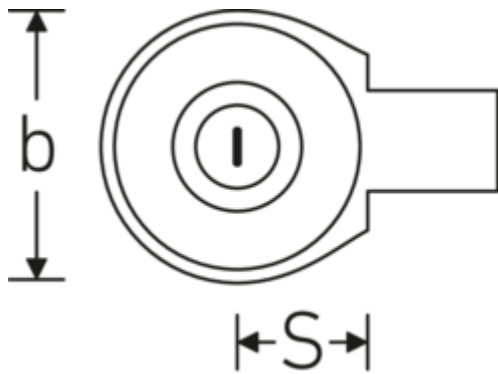

Technical attributes.

Size	40HD
Tool holder size [internal square]	14 x 18 mm
External square drive (inch)	3/4
Width mm (b)	58 mm
Height mm (h)	36 mm

Logistics data.

Product no.	58250065
GTIN	4018754208784
Weight (g)	725 g
Volume (packaged, dm3)	0.845 dm3
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig

Working angle 6 °
max. torque 650 N·m
S 30 mm

Customs tariff no. 82041100
Country of origin AWR GERMANY
Region of origin Nordrhein-Westfalen
Depth mm (IFS) 130
Width mm (IFS) 100
Height mm (IFS) 65
Weight (gross, kg) 0,730
Weight PAP (kg) 0,000
Weight PVC (kg) 0,005
Length (packaged, mm) 130
Width (packaged, mm) 100
Height (packaging, mm) 65

GTIN.



Spare part(s), spare part(s) for.



59251065
Spare part set for
ratchet

Images.

DAS RICHTIGE ANZIEHDREHMOMENT ERREICHEN

auch bei Einsatz von Steckwerkzeugen mit veränderten Stichmaßen.

Die Kräfte von Steckwerkzeugen, bei denen ein Stichtmaß L_1 verwendet wurde, können anders sein als bei den veränderten Stichtmaßen L_2 . Dies führt zu unterschiedlichen Drehmomenten.

Achtung! Bitte lesen Sie die Bedienungsanleitung oder Bedienungsanleitung sorgfältig, um die Berechnung der Kräfte bei Stichtmaß L_2 zu vermeiden. Bei falscher Angabe werden Schäden an den Bauteilen verursacht.

$$M_1 = F_1 \cdot L_1 \quad \left[\frac{\text{N} \cdot \text{mm}}{\text{mm}} \right]$$

$$M_2 = F_2 \cdot L_2$$

$$F_2 = F_1 \cdot \frac{L_1}{L_2}$$





STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal