



Fine-tooth ratchet insert adapter

735

Product no. **58250040**
GTIN **4018754034543**
Model **735/40**

Label. Fine-tooth ratchet insert adapter Drive 3/4 Tool holder 14 x 18

Benefits.

Robust and smooth-running ratchet insert adapter for torque wrenches with a square drive.

The reversible mechanism allows quick direction changes without having to change the plug - optimal for frequently changing screw directions.

Made from durable Chrome Alloy Steel and additionally chrome-plated for maximum durability and wear protection.

60 teeth enable a working angle of only 6° - for efficient working in confined spaces, e.g. in the engine compartment.

The integrated ball lock ensures that the socket wrench remains in place even at high torques.

Product highlights.



Quick change of direction.

Our ratchet insert adaptor is equipped with a finely tuned switch plate for lightning-fast direction change. Unlike conventional lever mechanisms, the rotating wheel prevents accidental adjustment - even in confined spaces or when working with gloves.



PRODUCT IMAGE
IN PROGRESS

Full precision in a minimum of space.

The high-quality fine toothing with 60 teeth allows a working angle of only 6°. This allows you to work in a controlled and efficient manner - even where there is hardly any space for tool movement. Ideal for precise bolted joints in tight installation conditions.



PRODUCT IMAGE
IN PROGRESS

High work safety.



The square drive allows the ratchet to be quickly and easily adapted to different applications and situations. The integrated ball lock ensures that the socket wrench remains securely in place even at high torques.



PRODUCT IMAGE
IN PROGRESS

High quality.

Technical drawing.

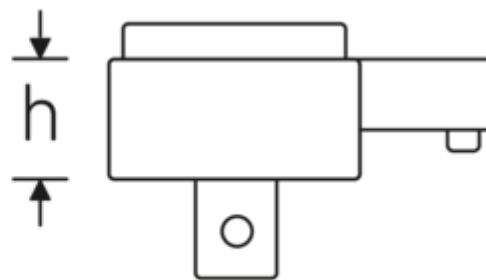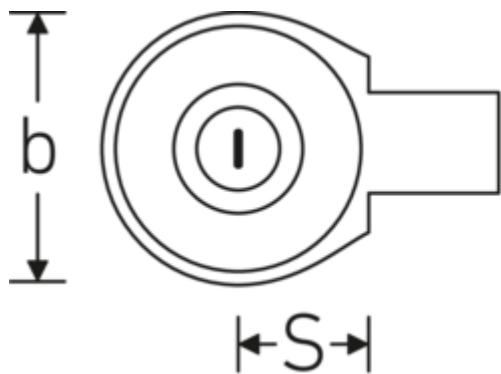

Technical attributes.

Size	40
Tool holder size [internal square]	14 x 18 mm
External square drive (inch)	3/4
Width mm (b)	50 mm
Height mm (h)	31,5 mm

Logistics data.

Product no.	58250040
GTIN	4018754034543
Weight (g)	515 g
Volume (packaged, dm3)	0.2856 dm3
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig

Working angle 6 °
max. torque 400 N·m
S 25 mm

Customs tariff no. 82041100
Country of origin AWR GERMANY
Region of origin Nordrhein-Westfalen
Depth mm (IFS) 75
Width mm (IFS) 50
Height mm (IFS) 55
Weight (gross, kg) 0,510
Weight PAP (kg) 0,000
Weight PVC (kg) 0,005
Length (packaged, mm) 100
Width (packaged, mm) 51
Height (packaging, mm) 56

GTIN.



Spare part(s), spare part(s) for.



59251040
Spare part set for ratchet

Images.

DAS RICHTIGE ANZIEHDREHMOMENT ERREICHEN

auch bei Einsatz von Steckwerkzeugen mit veränderten Stichmaßen.

Die Kräfte von Steckwerkzeugen, bei denen ein Stichtmaß L_1 verwendet wurde, ändern sich bei Einsatz veränderter Stichtmaße L_2 .
Anwendung: Die Kräfte ändern sich bei Einsatz von Steckwerkzeugen mit veränderten Stichtmaßen.

$$M_{1,2} = \frac{L_1}{L_2} \cdot M_1$$

$$M_{1,2} = \frac{L_1}{L_2} \cdot M_1 \cdot \frac{L_2}{L_1}$$





STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal