



Torque wrench Series MANOSKOP®

755R/1



Product no.	50100001
GTIN	4018754096268
Model	755R/1


Label.

MANOSKOP® torque wrench 755R/1 1,5-12,5N·m 1/4" L. 173.5mm

Properties.

- clicking type with dual stop signal
- for work on assembly lines or for repetitive production tasks.
- no adjustment scale; therefore adjustment with test equipment is required, e.g. with the STAHLWILLE test devices No. 7707 W, SmartCheck or the perfectControl® calibration system No. 7794, or calibration systems No. 7706. 7791)
- measurements are independent of the point of application of force
- for controlled clockwise tightening
- with permanently installed ratchet
- 22 teeth
- particularly slim design
- handle and shaft made of square steel pipe
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- can be supplied pre-set at defined torque value and with certification (additional charge applies)
- **accuracy $\pm 4\%$**

Technical drawing.

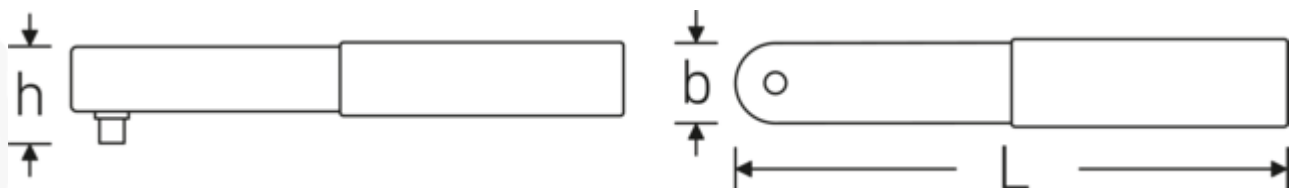

Technical attributes.

Anzeigeabweichung	± 4 %
Measuring range N·m	1,5-12,5 N·m
Measuring range ft·lb	1,0-9,0 ft·lb
MA N·m	1.5 N·m
Nominal value N·m	12.5 N·m
External square drive (inch)	1/4
Length mm (L)	173,5 mm
Width mm (b)	22 mm
Height mm (h)	18 mm

Logistics data.

Product no.	50100001
GTIN	4018754096268
Weight (g)	335 g
Volume (packaged, dm ³)	0.62192 dm ³
Packing standard	1
WEEE/ElektroG	nicht ear-pflichtig
Customs tariff no.	82041100
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Depth mm (IFS)	175
Width mm (IFS)	28
Height mm (IFS)	27
Weight (gross, kg)	0,405
Weight PAP (kg)	0,000
Weight PVC (kg)	0,066
Length (packaged, mm)	230
Width (packaged, mm)	52
Height (packaging, mm)	52

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal