

Standard MANOSKOP® torque wrenches w. permanently installed ratchet

721 Quick



Product no. **50204005**
GTIN **4018754268917**
Model **721/5 QUICK**



Label.

Torque wrench MANOSKOP® 721 Quick 6-50N·m 3/8" L. 352mm

Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- rapid setting thanks to easy-action locking lever in the handle
- ergonomically designed, non-slip adjuster with a thumb recess
- dual stop signal
- twin scales N·m/ft·lb
- optimised convex handle for strain-free working
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- all the sensitive components are protected by the sturdy tubular steel housing
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value ± 4%**

Advantages.

Made in Germany – STAHLWILLE release torque wrench, ratchet with punch square, length 352 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204005.

Lightning-fast and precise torque adjustment.

Patented, low-wear release system with bending rod.

Continued loading after release or loading in the opposite functional direction will not damage the torque wrench.

Product highlights.



Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

Technologies and features.



Factory calibration certificate (ISO calibration)


Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

Technical Drawing.

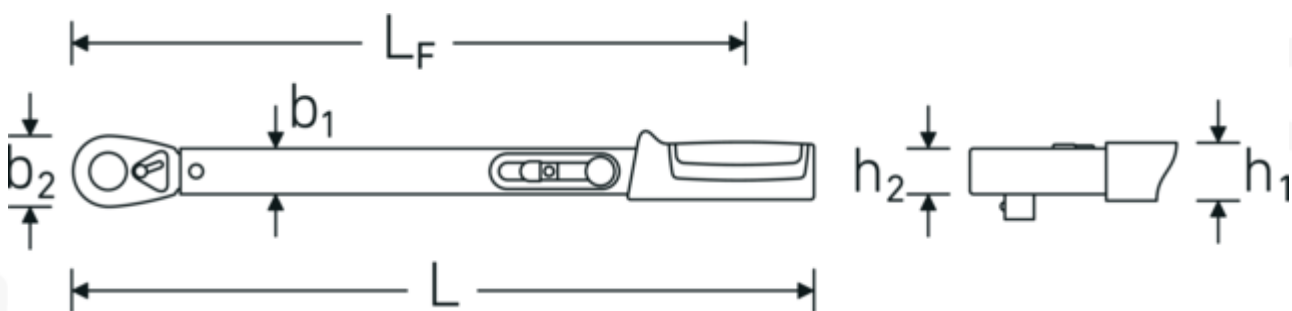

Technical Attributes.

Scale division ft·lb	1 ft·lb
Scale division N·m	2 N·m
Measuring range N·m	6-50 N·m

Logistics data.

Depth mm (IFS)	352
Width mm (IFS)	40
Height mm (IFS)	50

Measuring range ft-lb	5-36 ft-lb	WEEE/ElektroG	nicht ear-pflichtig
External square drive (inch)	3/8	Length (packed, mm)	370
Number of teeth	30	Width (packed, mm)	45
b1	28 mm	Height (packed, mm)	50
b2	27,5 mm	Volume (packed, dm3)	0.8325 dm3
DIN	DIN EN ISO 6789-2:2017	Product no.	50204005
Size	5	Weight (gross, kg)	0,960
Height mm (h1)	23 mm	Weight PAP (kg)	0,000
Height mm (h2)	14,5 mm	Weight PVC (kg)	0,000
Length mm (L)	352 mm	GTIN	4018754268917
LF	293 mm	Country of origin AWR	GERMANY
MA N·m	6 N·m	Region of origin	Nordrhein-Westfalen
Nominal value N·m	50 N·m	Customs tariff no.	82041100
		Packing standard	1
		Weight	880 g

Variants.

Product no.	Model no. (ERP)	Description	GTIN
50204005	721/5 QUICK	Torque wrench MANOSKOP® 721 Quick 6-50N·m 3/8" L. 352mm	4018754268917
50204015	721/15 QUICK	Torque wrench MANOSKOP® 721 Quick 30-150N·m 1/2" L. 452mm	4018754268924
50204020	721/20 QUICK	Torque wrench MANOSKOP® 721 Quick 40-200N·m 1/2" L. 483mm	4018754268931
50204030	721/30 QUICK	Torque wrench MANOSKOP® 721 Quick 60-300N·m 1/2" L. 553mm	4018754268948

GTIN-Code.



Spare parts/spare part for.



59191005

Ratchet spare parts
sets for torque
wrenches No.721

Images.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal