



## Standard MANOSKOP® torque wrenches w. permanently installed ratchet

### 721 Quick



Product no. **50204030**  
GTIN **4018754268948**  
Model **721/30 QUICK**



#### Label.

Torque wrench MANOSKOP® 721 Quick 60-300N·m 1/2" L. 553mm

#### Features.

- click-type
- the measuring element is only under load while force is being applied, no need for manual reset to zero
- rapid setting thanks to easy-action locking lever in the handle
- ergonomically designed, non-slip adjuster with a thumb recess
- dual stop signal
- twin scales N·m/ft·lb
- optimised convex handle for strain-free working
- any force applied to the tool after the 'click' or applied in the opposite direction to the current function – e.g. forcible loosening of a jammed screw - does not act on the trigger mechanism and cannot cause damage to it
- all the sensitive components are protected by the sturdy tubular steel housing
- calibration using perfectControl® calibrating unit No 7794 or calibration system No 7706. Readjustment does not require disassembly
- certificate in accordance with DIN EN ISO 6789-2:2017
- **display deviation value  $\pm 4\%$**

#### Advantages.

Made in Germany – STAHLWILLE release torque wrench, ratchet with punch square, length 553 mm, with calibration certificate (DIN EN ISO 6789-2:2017), 50204030.

Lightning-fast and precise torque adjustment.

Patented, low-wear release system with bending rod.

Continued loading after release or loading in the opposite functional direction will not damage the torque wrench.

## Product highlights.



### Fast.

Rapid setting thanks to the easy-action locking lever in the handle. Ergonomically designed, non-slip adjuster with a thumb recess for fast, safe setting of the slider.



### Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with two adjustment points for the maximum & minimum values.

## Technologies and features.



### Factory calibration certificate (ISO calibration)


Our torque tools, transducers and test equipment are delivered with a factory calibration certificate in accordance with DIN EN ISO 6789-2 and based on DKD-R 10-8 for traceability of the measuring equipment.



### 2-component handle

Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids and Skydrol. The arrow markings on the handle indicate the direction of operation.

## Technical Drawing.

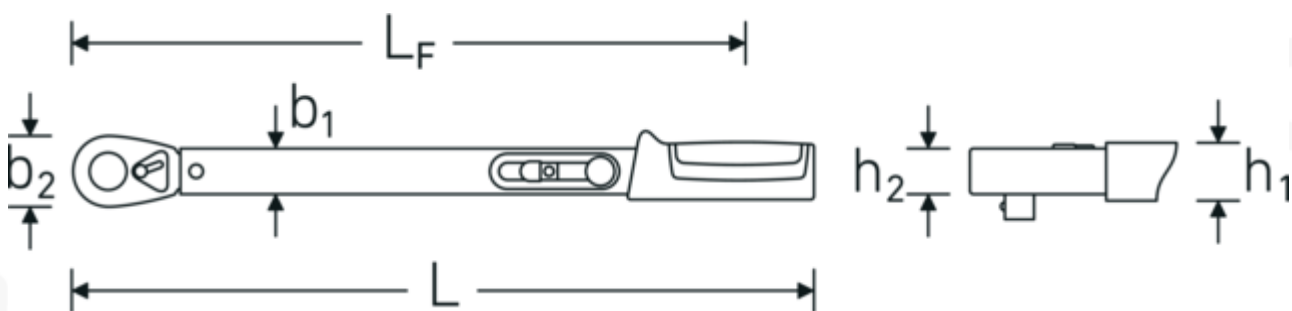

## Technical Attributes.

Scale division ft-lb	10 ft-lb
Scale division N-m	10 N-m
Measuring range N-m	60-300 N-m

## Logistics data.

Depth mm (IFS)	555
Width mm (IFS)	46
Height mm (IFS)	30

<b>Measuring range ft·lb</b>	50-220 ft·lb	<b>WEEE/ElektroG</b>	nicht ear-pflichtig
<b>External square drive (inch)</b>	1/2	<b>Length (packed, mm)</b>	580
<b>Number of teeth</b>	36	<b>Width (packed, mm)</b>	46
<b>b1</b>	28 mm	<b>Height (packed, mm)</b>	45
<b>b2</b>	44 mm	<b>Volume (packed, dm3)</b>	1.2006 dm3
<b>DIN</b>	DIN EN ISO 6789-2:2017	<b>Product no.</b>	50204030
<b>Size</b>	30	<b>Weight (gross, kg)</b>	1,810
<b>Height mm (h1)</b>	23 mm	<b>Weight PAP (kg)</b>	0,000
<b>Height mm (h2)</b>	27,5 mm	<b>Weight PVC (kg)</b>	0,114
<b>Length mm (L)</b>	553 mm	<b>GTIN</b>	4018754268948
<b>LF</b>	486 mm	<b>Country of origin AWR</b>	GERMANY
<b>MA N·m</b>	60 N·m	<b>Region of origin</b>	Nordrhein-Westfalen
<b>Nominal value N·m</b>	300 N·m	<b>Customs tariff no.</b>	82041100
		<b>Packing standard</b>	1
		<b>Weight</b>	1646 g

## Variants.

Product no.	Model no. (ERP)	Description	GTIN
50204005	721/5 QUICK	Torque wrench MANOSKOP® 721 Quick 6-50N·m 3/8" L. 352mm	4018754268917
50204015	721/15 QUICK	Torque wrench MANOSKOP® 721 Quick 30-150N·m 1/2" L. 452mm	4018754268924
50204020	721/20 QUICK	Torque wrench MANOSKOP® 721 Quick 40-200N·m 1/2" L. 483mm	4018754268931
50204030	721/30 QUICK	Torque wrench MANOSKOP® 721 Quick 60-300N·m 1/2" L. 553mm	4018754268948

## GTIN-Code.



## Spare parts/spare part for.



59191030  
Ratchet spare parts  
sets for torque  
wrenches No.721

## Images.



**STAHLWILLE Eduard Wille GmbH & Co. KG**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-200  
info@stahlwille.de · www.stahlwille.com · Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal  
Copyright by STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal