



## Pullers, three-armed

**11351**

Product no. **71035102**

GTIN **4018754342068**

Model **11351/2**

### **Label.**

Puller Clamping w.220mm x Clamping depth170mm

### **Properties.**

- three-armed
- with self-centring puller arms
- for gears, ball bearings, pulleys and similar parts from a shaft or axle
- double-sided use of the extractor hooks: narrow arm end (20 mm) for narrow installation spaces, wide arm end (24 mm) with slot (8 mm) for pulling off washers or gear wheels with the aid of 8 mm screws
- nitrided spindle, no lubrication required, maintenance-free
- zinc plated

### **Benefits.**

For quick and reliable removal of gears, ball bearings, pulleys and for extracting the outer rings of ball bearings and bushings from drilled holes.

Automatic pressure of the arms under load makes application easier.

The nitrided surface of the spindle allows it to move easily so it does not require additional lubrication.

The arm ends have a narrow and wide design and can therefore be used on both sides.


Outstanding flexural strength thanks to legs with precisely manufactured profiles and smooth, milled guides.

## Product highlights.



### **Reliable sliding properties.**

The high-quality tempered and specially coated pressure spindle has particularly good sliding properties in the thread, is maintenance-free and does not require oiling.



### **Adapted access geometry.**

Heavy-duty puller hooks made of oil-hardened Chrome Alloy Steel with special access geometry for tight spaces. Custom radii for shafts and axes.



### **Protection against damage.**


The centering tip is freely rotating - to protect the shafts from damage.

### For increased safety.

Thoughtfully designed, die-forged and precisely machined, hardened and tempered on state-of-the-art machines - the STAHLWILLE puller range offers numerous products for a wide range of applications. For example, terminal pullers, pullers for ball joints, counter stays or ball joint extractors - always in premium quality.



## Technical drawing.

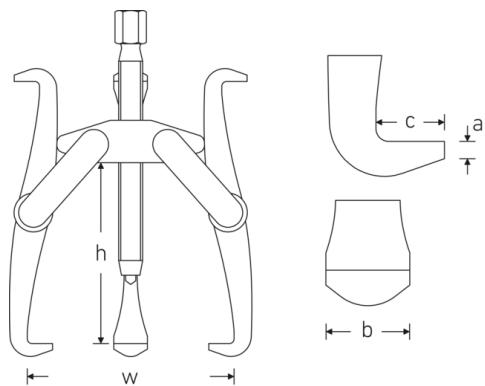

## Technical attributes.

External hex drive (mm)	19 mm
Thickness of hook base tip mm (a)	3 mm
Hook base width mm (b)	24 mm
Hook foot depth mm (c)	12 mm
Size	2
Number of hooks	3
max. load	7,5 t
Clamping depth (h) mm	170 mm
Spindle thread size	M18 x 1,5 x 170
Span mm (w)	220 mm

## Logistics data.

Depth mm (IFS)	250
Width mm (IFS)	150
Height mm (IFS)	130
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	295
Width (packaged, mm)	160
Height (packaging, mm)	160
Volume (packaged, dm3)	7.552 dm3
Product no.	71035102
Weight (gross, kg)	3,186
Weight PAP (kg)	0,164
Weight PVC (kg)	0,000
GTIN	4018754342068
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82055980
Packing standard	1

Weight (g)

3200 g

## Variants.

Product no.	Model No. (ERP)	Description	GTIN
71035101	11351/1	Puller Clamping w.160mm x Clamping depth130mm	4018754342051
71035102	11351/2	Puller Clamping w.220mm x Clamping depth170mm	4018754342068

## GTIN.



## Spare part(s), spare part(s) for.



79281007  
Puller spindle

## Images.



**STAHLWILLE Eduard Wille GmbH**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

[info@stahlwille.de](mailto:info@stahlwille.de) · [www.stahlwille.com](http://www.stahlwille.com)

© STAHLWILLE Eduard Wille GmbH, Wuppertal