



Combination wrenches, imperial

130a



Product no. **40572222**
GTIN **4018754020652**
Model **130a 11/32**



Label.

Combination wrench Size 11/32 " L.120mm

Properties.

- **imperial, identical** end sizes
- jaw angled 15°
- ring with bi-hex and AS-Drive profile
- ring-end cranked 15°
- durable, slim and lightweight design
- high flexural strength due to double-T profile
- STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
- drop-forged, hardened, and cooled in an oil bath
- HPQ® high performance steel, chrome-plated
- Fed. Spec. GGG-W-636 E

Benefits.

Made in Germany - STAHLWILLE Combination wrenches, imperial, jaw side 15 ° angled, length 120 mm, Fed. Spec. GGG-W-636 E, HPQ® high performance steel, 40572222.

The AS-Drive profile prevents damage to the fastener caused by force being applied to the edges of the nut or bolt.

The distinctive STAHLWILLE rounded finish ensures the wrench is comfortable to hold and is easy to grip, ensuring safe working, even with oily hands.

Special manufacturing process makes thin-walled rings possible - perfect for working in places that are difficult to access.

The double-T profile gives the wrench outstanding flexural strength.

Product highlights.



A solution for every situation.

Our combination wrenches are available in different versions (metric, imperial, long, with Spline-Drive profile) and as sets in textile bags, roll-up tool bags or TCS inlays.

Technologies and features.



High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.



Anti-Slip-Drive

The special AS-Drive profile makes high force transmission to the flats of bolts and nuts possible without damaging them. This also prevents stripping of the bolt head.



Double-T profile

Our ring, open-ended and combination wrenches have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Thin-walled rings


The thin-walled diameter of our rings makes it easier to work in confined spaces. The ring wall is deeper than standard nuts, which prevents jamming.



Offset Shaft Design

Our wrenches are specially designed with additional reinforcement in the load zones where the greatest amount of force is transmitted - namely where the jaw meets the shank - in order to prevent deformation.

Technical drawing.

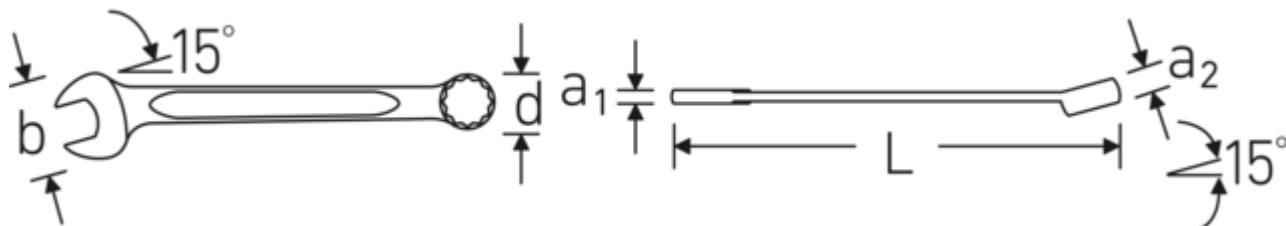

Technical attributes.

a1	4,9 mm
a2	7 mm
Width mm (b)	19 mm
d	13,1 mm
DIN	Fed. Spec. GGG-W-636 E
Length mm (L)	120 mm
Alloy	HPQ® high performance steel
Jaws angled	15 °
Surface	chrome-plated
Ring position	15 °
Size 1 [inch]	11/32 "
Size 2 [inch]	11/32 "

Logistics data.

Depth mm (IFS)	118
Width mm (IFS)	19
Height mm (IFS)	10
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	130
Width (packaged, mm)	40
Height (packaging, mm)	35
Volume (packaged, dm3)	0.182 dm3
Product no.	40572222
Weight (gross, kg)	0,250
Weight PAP (kg)	0,000
Weight PVC (kg)	0,003
GTIN	4018754020652
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	10
Weight (g)	25 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
40571616	130a 1/4	Combination wrench Size 1/4 " L.105mm	4018754020621
40571818	130a 9/32	Combination wrench Size 9/32 " L.110mm	4018754020638
40572020	130a 5/16	Combination wrench Size 5/16 " L.115mm	4018754020645
40572222	130a 11/32	Combination wrench Size 11/32 " L.120mm	4018754020652
40572424	130a 3/8	Combination wrench Size 3/8 " L.125mm	4018754020669
40572828	130a 7/16	Combination wrench Size 7/16 " L.135mm	4018754020676
40573232	130a 1/2	Combination wrench Size 1/2 " L.150mm	4018754020683
40573434	130a 9/16	Combination wrench Size 9/16 " L.165mm	4018754020690

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal