



## Torque wrench MANOSKOP®

### 721QR Quick



Product no. **50204115**  
GTIN **4018754268955**  
Model **721QR/15 QUICK**



#### Label.

Torque wrench MANOSKOP® 721QR Quick 30-150N·m 1/2" L. 452.5mm

## Product highlights.



#### Rapid adjustment.

Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



#### Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

## Technologies and features.



#### QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.



### Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that the spring does not need to be reset to '0' after use.



### 2-component handle




Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



### DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

## Technical drawing.

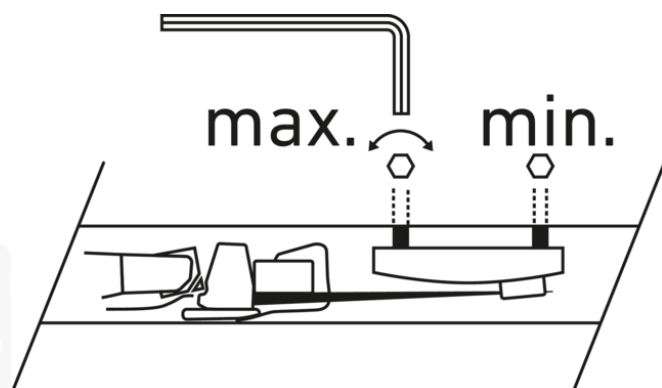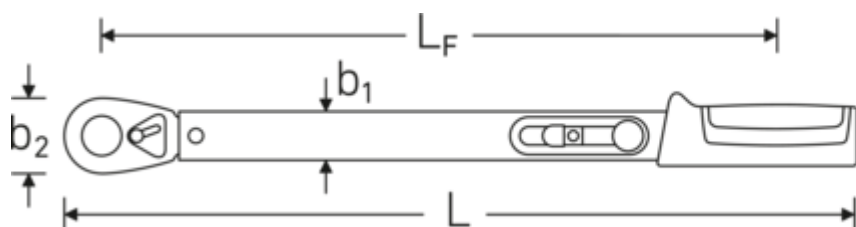

## Technical attributes.

Scale division N·m	5 N·m
Scale division ft·lb	5 ft·lb
Measuring range N·m	30-150 N·m
Measuring range ft·lb	25-110 ft·lb
External square drive (inch)	1/2
b1	28 mm
b2	41 mm
DIN	DIN EN ISO 6789-2:2017
Size	15
Height mm (h1)	23 mm
Height mm (h2)	18 mm
Length mm (L)	452,5 mm
LF	387 mm
MA N·m	30 N·m
Nominal value N·m	150 N·m

## Logistics data.

Depth mm (IFS)	455
Width mm (IFS)	43
Height mm (IFS)	40
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	475
Width (packaged, mm)	45
Height (packaging, mm)	45
Volume (packaged, dm3)	0.961875 dm3
Product no.	50204115
Weight (gross, kg)	1,378
Weight PAP (kg)	0,000
Weight PVC (kg)	0,011
GTIN	4018754268955
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	1268 g

## Variants.

Product no.	Model No. (ERP)	Description	GTIN
50204115	721QR/15 QUICK	Torque wrench MANOSKOP® 721QR Quick 30-150N·m 1/2" L. 452.5mm	4018754268955
50204120	721QR/20 QUICK	Torque wrench MANOSKOP® 721QR Quick 40-200N·m 1/2" L. 482mm	4018754268962

## GTIN.



## Images.





**STAHLWILLE Eduard Wille GmbH**

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

[info@stahlwille.de](mailto:info@stahlwille.de) · [www.stahlwille.com](http://www.stahlwille.com)

© STAHLWILLE Eduard Wille GmbH, Wuppertal