



Torque wrench service MANOSKOP® (N·m/in·lb)

730a Quick



Product no. **50584012**
GTIN **4018754268993**
Model **730A/12 QUICK**



Label.

Torque wrench service MANOSKOP® 730a Quick 25-130N·m 14 x 18 mm L. 410mm



Product highlights.



Rapid adjustment.

Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.



QuickSelect

Lightning-fast target value setting: Unlock the adjustment knob, set the value, and lock the knob again.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that the spring does not need to be reset to '0' after use.



2-component handle


Our 2-component handle is non-slip and ergonomically designed. It is resistant to the most common oils, greases, fuels, brake fluids, and Skydrol. The arrow markings on the handle indicate the direction of operation.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

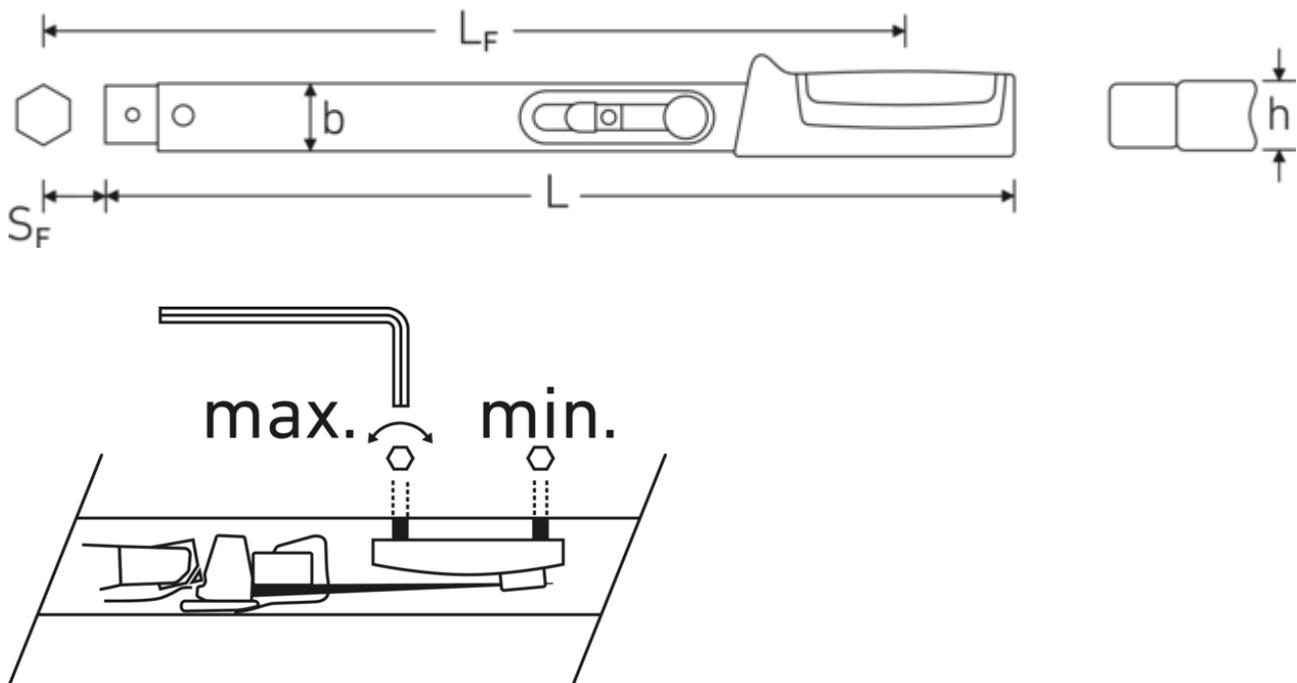

Technical attributes.

Scale division in-lb	25 in·lb
Scale division N·m	2,5 N·m
Measuring range N·m	25-130 N·m
Measuring range in-lb	225-1150 in·lb
Width mm (b)	28 mm
DIN	DIN EN ISO 6789-2:2017
Size	a/12
Tool holder size [internal square]	14 x 18 mm
Height mm (h)	23 mm
Length mm (L)	410 mm
LF	390 mm
SF	25 mm

Logistics data.

Depth mm (IFS)	405
Width mm (IFS)	50
Height mm (IFS)	40
WEEE/ElektroG	nicht ear-pflichtig
Length (packaged, mm)	435
Width (packaged, mm)	50
Height (packaging, mm)	50
Volume (packaged, dm ³)	1.0875 dm ³
Product no.	50584012
Weight (gross, kg)	1,186
Weight PAP (kg)	0,000
Weight PVC (kg)	0,110
GTIN	4018754268993
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Customs tariff no.	82041100
Packing standard	1
Weight (g)	1076 g

Variants.

Product no.	Model No. (ERP)	Description	GTIN
50584005	730A/5 QUICK	Torque wrench service MANOSKOP® 730a Quick 6-50N·m 9 x 12 mm L. 315mm	4018754268979
50584010	730A/10 QUICK	Torque wrench service MANOSKOP® 730a Quick 20-100N·m 9 x 12 mm L. 370mm	4018754268986
50584012	730A/12 QUICK	Torque wrench service MANOSKOP® 730a Quick 25-130N·m 14 x 18 mm L. 410mm	4018754268993
50584020	730A/20 QUICK	Torque wrench service MANOSKOP® 730a Quick 40-200N·m 14 x 18 mm L. 455mm	4018754269006

GTIN.



Images.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal