



VDE MANOSKOP® torque wrench w.QuickRelease ratchet

730R VDE



Product no. **96550150**
GTIN **4018754271900**
Model **730R/5 VDE**



Label.

VDE MANOSKOP torque wrench w.QuickRelease ratchet 730R VDE -ft·lb 3/8" L.
391.5mm

Properties.

- tactile dual stop signal
- with 3/8" ratchet insert (tool holder 9 x 12 mm)
- replace the ratchet adapter 725QR VDE without having to check the insulation again
- no reset to "0" required, since measuring element is only loaded during tightening
- with QuickRelease safety lock
- fast, precise adjustment with QuickSelect quick adjustment
- protective insulation according to IEC 60900-AC 1.000 V / DC 1.500 V
- with insulating sleeve made of glass-fibre reinforced polyamide plastic
- the insulation is resistant to many liquids such as alkalis, fuels or oils
- double scale of N·m/ft·lb resp. N·m/in·lb
- low-wear triggering mechanism
- readjustment without disassembly and without checking the insulation again
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy $\pm 3\%$**

Benefits.

Mechanically setting/clicking torque wrench for controlled screw tightening.

Low-wear triggering system with flexible rod ensures consistently correct and reliable measurement results.

Change the ratchet adapter without checking the insulation again.

The special plastic sheath of the MANOSKOP® 730R VDE offers reliable protection for safe and efficient work at voltages of up to 1,000 volts.

The torque wrench can be readjusted independently without disassembly and a new insulation test.



Product highlights.



Adjustment does not require disassembly.

The VDE torque wrenches have two setting points for the upper and lower value, which allows for easy adjustment from the outside without requiring disassembly of the tool. This also means there is no need to check the insulation again.



Triggering dual stop signal.

The MANOSKOP® provides a clearly noticeable dual stop signal when the set value is reached.



Precise fine adjustment.

Thanks to QuickSelect, the target torque can be set in no time at all - and with extreme precision, as it can be read off the additional scale ring in particularly fine increments.



Exchangeable ratchet adaptor.

The STAHLWILLE MANOSKOP® 730R VDE is the only insulated torque wrench on the market where the insert ratchet (9 x 12 mm, 3/8") can be replaced without the need for a new insulation test thanks to a mount for interchangeable insert tools (9 x 12 mm, 3/8").



Insulating plastic sheath.

The special plastic sheath of the MANOSKOP® 730R VDE reliably protects up to 1,000 volts. It is also non-slip, abrasion-resistant and resistant to diluted alkaline solutions, hydrocarbons, fuels and oils.

Technologies and features.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.



Low-wear bending beam system


Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that the spring does not need to be reset to '0' after use.



DIN EN ISO 6789-2

Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.

Technical drawing.

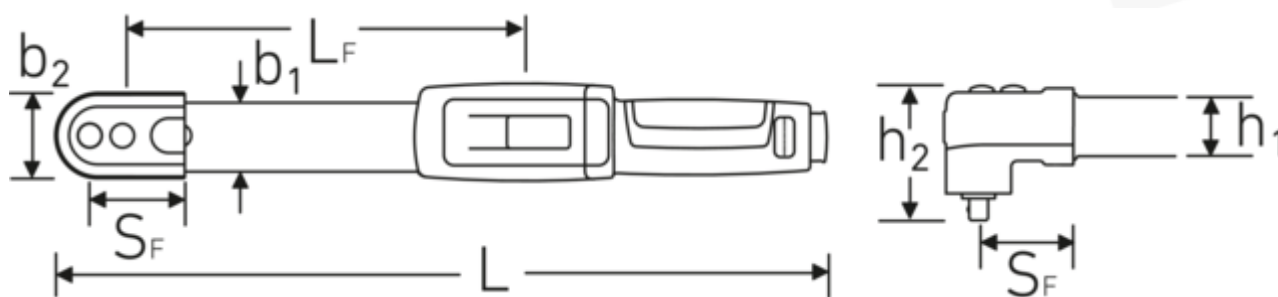

Technical attributes.

Scale division in-lb	- in-lb
Scale division N·m	5 N·m
Scale division ft-lb	1 ft-lb
Measuring range N·m	10-50 N·m

Logistics data.

Depth mm (IFS)	425
Width mm (IFS)	85
Height mm (IFS)	85
WEEE/ElektroG	nicht ear-pflichtig

Measuring range ft-lb	7-37 ft-lb	Length (packaged, mm)	425
Measuring range in-lb	- in-lb	Width (packaged, mm)	85
External square drive (inch)	3/8	Height (packaging, mm)	85
b1	35 mm	Volume (packaged, dm ³)	3.070625 dm ³
b2	45 mm	Product no.	96550150
DIN	DIN EN ISO 6789-2:2017	Weight (gross, kg)	1,365
Fine scale division	0,25 N·m	Weight PAP (kg)	0,000
Size	5	Weight PVC (kg)	0,000
Tool holder size [internal square]	9 x 12 mm	GTIN	4018754271900
Height mm (h1)	30 mm	Country of origin AWR	GERMANY
Height mm (h2)	56 mm	Region of origin	Nordrhein-Westfalen
Length mm (L)	391,5 mm	Customs tariff no.	82041100
LF	308,5 mm	Packing standard	1
SF	28 mm	Weight (g)	1140 g

Parts list.



55010050
VDE MANOSKOP®
torque wrench

Variants.

Product no.	Model No. (ERP)	Description	GTIN
96550125	730R/2.5 VDE	VDE torque wrench MANOSKOP® 730R VDE 40-220ft-lb 3/8" L. 337mm	4018754271894
96550150	730R/5 VDE	VDE MANOSKOP torque wrench w.QuickRelease ratchet 730R VDE -ft-lb 3/8" L. 391.5mm	4018754271900

GTIN.



Images.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal