STAHL**WILLE**()®



Combination spanner set OPEN BOX, metric

OPEN BOX 14

Product no. 96401007

GTIN 4018754095964 **OPEN BOX 14/10 KT** Model











Label.

Combination spanner set OPEN BOX 14/10 KT 8-19 10 pcs.

Properties.

- · metric, identical end sizes
- long design for higher power transmission
- ring-end cranked 10°, jaw angled 15°
- · reinforcement between jaw and shaft
- · durable, slim and lightweight design
- extremely resilient and durable
- high flexural strength due to double-T profile
- STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
- · drop-forged, hardened, and cooled in an oil bath
- Chrome Alloy Steel, chrome-plated
- DIN 3113 Form B/ISO 7738 Form B
- · in sturdy cardboard packaging

Benefits.

High-quality 10 pcs.-piece combination spanner set in metric sizes.

The long force loading point requires less effort with constant torque.

Special manufacturing process makes thin-walled rings possible - perfect for working in places that are difficult to access.

The AS-Drive profile prevents damage to the fastener caused by force being applied to the edges of the nut or bolt.





Product highlights.



Non-slip surface

STAHLWILLE spanners have a high-quality surface finish with good grip, making it possible to work safely and efficiently, even with greasy hands. The non-slip property improves control during handling.



A solution for every situation.

Our combination spanners are available in different versions (metric, imperial, long, with Spline-Drive profile) and as sets in textile bags, roll-up tool pouches or TCS inlays.

Technologies and features.



Anti-Slip-Drive

The special AS-Drive profile makes high force transmission to the flats of screws and bolts possible without damaging them. This also prevents stripping of the screw head.



Double-T profile

Our combination and ring spanners have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



Thin-walled rings


The thin wall diameter of our rings makes it easier to work in confined spaces. The ring sides are taller than standard nuts, which prevents jamming.



Offset Shaft Design

Our spanners are specially designed with additional reinforcement in the load zones where the greatest amount of force is transmitted - namely where the jaw meets the shank - in order to prevent deformation.

Technical drawing.

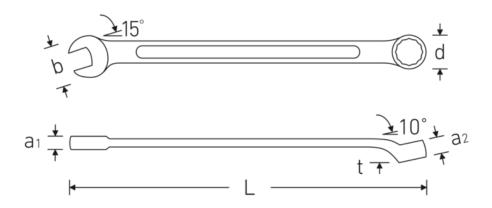

Technical attributes.

Number of tools	10 pcs.	
Range	8-19	
DIN	DIN 3113 Form B / ISO 7738 Form B	
Capacy	8; 10; 11; 12; 13; 14; 16; 17; 18; 19 mm	
Alloy	Chrome Alloy Steel	
Jaw angle	10 °	
Model no.	14/10 KT	
Surface	chrome-plated	

Logistics data.

Depth mm (IFS)	410	
Width mm (IFS)	182	
Height mm (IFS)	35	
WEEE/ElektroG	nicht ear-pflichtig	
Length (packed, mm)	410	
Width (packed, mm)	182	
Height (packed, mm)	35	
Volume (packed, dm3)	2.6117 dm3	
Art. no.	96401007	
Weight (gross, kg)	1,235	
Weight PAP (kg)	0,000	
Weight PVC (kg)	0,020	
GTIN	4018754095964	
Country of origin AWR	GERMANY	
Region of origin	Nordrhein-Westfalen	
Packaging	in robust roll-up tool pouch	
Customs tariff no.	82041100	
Packing standard	1	
Weight	1235 g	

Variants.

Art. no.	Model no. (ERP)	Description	GTIN
96401010	OPEN BOX 14/15N	Combination spanner set OPEN BOX 14/15N 10-30 15 pcs.	4018754122936

4018754095964

96401007

GTIN.



Images.



