



## Combination spanners, imperial

### 130a



Product no. **40571818**  
GTIN **4018754020638**  
Model **130a 9/32**



#### Label.

Combination spanner Spanner size 9/32 " L.110mm

#### Properties.

- **imperial, identical** end sizes
- jaw angled 15°
- ring with bi-hex and AS-Drive profile
- ring-end cranked 15°
- durable, slim and lightweight design
- high flexural strength due to double-T profile
- STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
- drop-forged, hardened, and cooled in an oil bath
- HPQ® high performance steel, chrome-plated
- Fed. Spec. GGG-W-636 E

## Benefits.

Made in Germany - STAHLWILLE Combination spanners, imperial, jaw side 15 ° angled, length 110 mm, Fed. Spec. GGG-W-636 E, HPQ® high performance steel, 40571818.

The AS-Drive profile prevents damage to the fastener caused by force being applied to the edges of the nut or bolt.

The distinctive STAHLWILLE rounded finish ensures the spanner is comfortable to hold and is easy to grip, ensuring safe working, even with oily hands.

Special manufacturing process makes thin-walled rings possible - perfect for working in places that are difficult to access.

The double-T profile gives the spanner outstanding flexural strength.

## Product highlights.



### A solution for every situation.

Our combination spanners are available in different versions (metric, imperial, long, with Spline-Drive profile) and as sets in textile bags, roll-up tool pouches or TCS inlays.

## Technologies and features.



### High Performance Quality (HPQ®)

Our HPQ® tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.



### Anti-Slip-Drive

The special AS-Drive profile makes high force transmission to the flats of screws and bolts possible without damaging them. This also prevents stripping of the screw head.



### Double-T profile

Our combination and ring spanners have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.



### Thin-walled rings


The thin wall diameter of our rings makes it easier to work in confined spaces. The ring sides are taller than standard nuts, which prevents jamming.



### Offset Shaft Design

Our spanners are specially designed with additional reinforcement in the load zones where the greatest amount of force is transmitted - namely where the jaw meets the shank - in order to prevent deformation.

## Technical drawing.

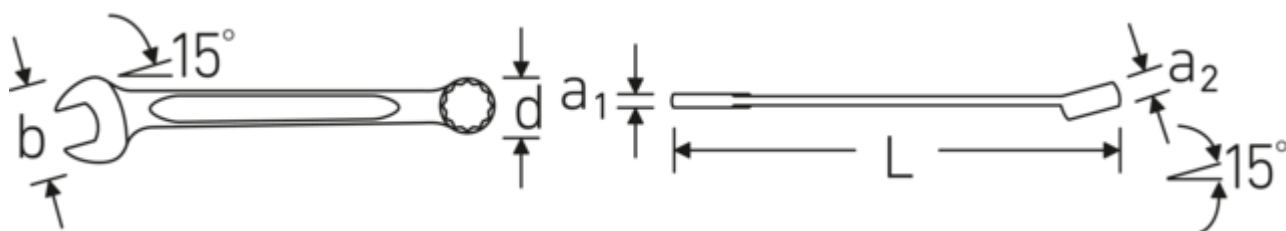

## Technical attributes.

|                          |                             |
|--------------------------|-----------------------------|
| a1                       | 4,1 mm                      |
| a2                       | 6 mm                        |
| Width mm (b)             | 15,5 mm                     |
| d                        | 10,9 mm                     |
| DIN                      | Fed. Spec. GGG-W-636 E      |
| Length mm (L)            | 110 mm                      |
| Alloy                    | HPQ® high performance steel |
| Jaw angle                | 15 °                        |
| Surface                  | chrome-plated               |
| Ring position            | 15 °                        |
| Spanner width 1 [inch]   | 9/32 "                      |
| Spanner width s 2 [inch] | 9/32 "                      |

## Logistics data.

|                       |                     |
|-----------------------|---------------------|
| Depth mm (IFS)        | 109                 |
| Width mm (IFS)        | 15                  |
| Height mm (IFS)       | 8                   |
| WEEE/ElektroG         | nicht ear-pflichtig |
| Length (packed, mm)   | 115                 |
| Width (packed, mm)    | 38                  |
| Height (packed, mm)   | 25                  |
| Volume (packed, dm3)  | 0.10925 dm3         |
| Art. no.              | 40571818            |
| Weight (gross, kg)    | 0,160               |
| Weight PAP (kg)       | 0,000               |
| Weight PVC (kg)       | 0,003               |
| GTIN                  | 4018754020638       |
| Country of origin AWR | GERMANY             |
| Region of origin      | Nordrhein-Westfalen |
| Customs tariff no.    | 82041100            |
| Packing standard      | 10                  |
| Weight                | 16 g                |

## Variants.

| Art. no. | Model no. (ERP) | Description                                     | GTIN          |
|----------|-----------------|---|---------------|
| 40571616 | 130a 1/4        | Combination spanner Spanner size 1/4 " L.105mm  | 4018754020621 |
| 40571818 | 130a 9/32       | Combination spanner Spanner size 9/32 " L.110mm | 4018754020638 |
| 40572020 | 130a 5/16       | Combination spanner Spanner size 5/16 " L.115mm | 4018754020645 |

|          |            |   |               |
|----------|------------|---|---------------|
| 40572222 | 130a 11/32 | Combination spanner Spanner size<br>11/32 " L.120mm | 4018754020652 |
| 40572424 | 130a 3/8   | Combination spanner Spanner size 3/8<br>" L.125mm   | 4018754020669 |
| 40572828 | 130a 7/16  | Combination spanner Spanner size<br>7/16 " L.135mm  | 4018754020676 |
| 40573232 | 130a 1/2   | Combination spanner Spanner size 1/2<br>" L.150mm   | 4018754020683 |
| 40573434 | 130a 9/16  | Combination spanner Spanner size<br>9/16 " L.165mm  | 4018754020690 |

## GTIN.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-393

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal