

Torque angle gauge

7380N/7385N




Product no. **54010001**
GTIN **4018754136124**
Model **7380N**

Label. Torque angle gauge No. 7380N Internal square 1/2" External square 1/2" L.416mm

- Properties.**
- for angle controlled bolt/screw tightening, with static read-off point
 - read-off possible from any angle thanks to a pair of angled scales
 - removable magnet for attaching sockets with 1/2" internal square drive
 - for use in conjunction with tightening tools such as service MANOSKOP® No 730N
 - since this tightening method requires a pre-determined snug torque to be applied, it is essential to choose a torque wrench covering both snug torque as well as maximum torque required to reach the recommended tightening angle
 - whether 1/2" or 3/4" square drive torque angle gauge is used depends upon the square drive of the appropriate torque wrench employed

Technical drawing.

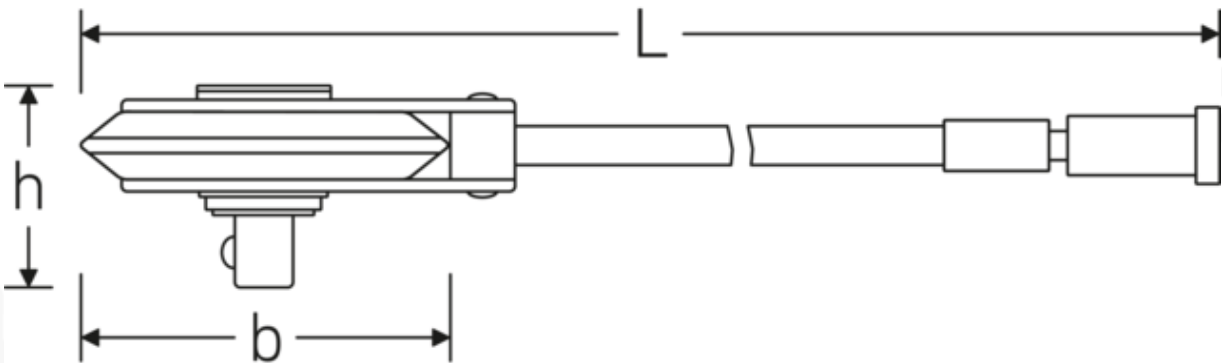

Technical attributes.

Internal square [inch]	1/2 "
External square [inch]	1/2 "

Logistics data.

Depth mm (IFS)	390
Width mm (IFS)	80

Width mm (b)	78 mm	Height mm (IFS)	52
Height mm (h)	43 mm	WEEE/ElektroG	nicht ear-pflichtig
Length mm (L)	416 mm	Length (packed, mm)	390
Model no.	7380N	Width (packed, mm)	80
Scale division	2°	Height (packed, mm)	52
		Volume (packed, dm3)	1.6224 dm3
		Art. no.	54010001
		Weight (gross, kg)	0,495
		Weight PAP (kg)	0,090
		Weight PVC (kg)	0,000
		GTIN	4018754136124
		Country of origin AWR	GERMANY
		Region of origin	Nordrhein-Westfalen
		Customs tariff no.	82041100
		Packing standard	1
		Weight	505 g

Variants.

Art. no.	Model no. (ERP)	Description	GTIN
54010001	7380N	Torque angle gauge No. 7380N Internal square 1/2" External square 1/2" L.416mm	4018754136124
54010002	7385N	Torque angle gauge No. 7385N Internal square 3/4" External square 3/4" L.416mm	4018754136131

GTIN.



STAHLWILLE Eduard Wille GmbH & Co. KG

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-393

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal