

Combination spanners, imperial

130a



Product no.	40571616
GTIN	4018754020621
Model	130a 1/4



Label.

Combination spanner Size 1/4 " L.105mm

Properties.

- imperial, identical end sizes
- jaw angled 15°
- ring with bi-hex and AS-Drive profile
- ring-end cranked 15°
- durable, slim and lightweight design
- high flexural strength due to double-T profile
- STAHLWILLE's rounded finish ensures a non-slip, pleasant feel
- drop-forged, hardened, and cooled in an oil bath
- HPQ[®] high performance steel, chrome-plated
- Fed. Spec. GGG-W-636 E

Benefits.

Made in Germany - STAHLWILLE Combination spanners, imperial , jaw side 15 ° angled, length 105 mm, Fed. Spec. GGG-W-636 E, HPQ® high performance steel, 40571616.

The AS-Drive profile prevents damage to the fastener caused by force being applied to the edges of the nut or bolt.

The distinctive STAHLWILLE rounded finish ensures the spanner is comfortable to hold and is easy to grip, ensuring safe working, even with oily hands.

Special manufacturing process makes thin-walled rings possible - perfect for working in places that are difficult to access.

The double-T profile gives the spanner outstanding flexural strength.


Product highlights.



A solution for every situation.

Our combination spanners are available in different versions (metric, imperial, long, with Spline-Drive profile) and as sets in textile bags, roll-up tool pouches or TCS inlays.

Technologies and features.

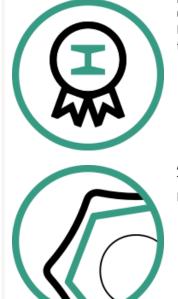

High Performance Quality (HPQ®)

Our HPQ[®] tool is made of wear-resistant high-performance steel, yet is thin-walled and lightweight. It withstands high torques and is ideal for work in confined spaces such as turbines.

Anti-Slip-Drive

The special AS-Drive profile makes high force transmission to the flats of screws and bolts possible without damaging them. This also prevents stripping of the screw head.

Double-T profile

Our combination and ring spanners have an additional recess in the middle of the tool. Similar to the principle of a double-T beam, this provides a tremendous load capacity and maximum strength whilst reducing weight.

Thin-walled rings

The thin wall diameter of our rings makes it easier to work in confined spaces. The ring sides are taller than standard nuts, which prevents jamming.






Offset Shaft Design

Our spanners are specially designed with additional reinforcement in the load zones where the greatest amount of force is transmitted - namely where the jaw meets the shank - in order to prevent deformation.

Technical drawing.

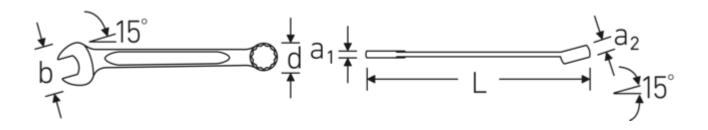

Technical attributes.

a1	3,6 mm	Dep
a2	6 mm	Widt
Width mm (b)	14,2 mm	Heig
d	9,8 mm	WEE
DIN	Fed. Spec. GGG-W-636 E	Leng
Length mm (L)	105 mm	Widt
Alloy	HPQ [®] high performance	Heig
	steel	Volu
Jaws angled	15 °	Proc
Surface	chrome-plated	Weig
Ring position	15 °	Weig
Size 1 [inch]	1/4 "	Weig
Size 2 [inch]	1/4 "	GTIN
		0111
		Cou

Logistics data.

Depth mm (IFS)	114	
Width mm (IFS)	14	
Height mm (IFS)	9	
WEEE/ElektroG	nicht ear-pflichtig	
Length (packaged, mm)	120	
Width (packaged, mm)	25	
Height (packaging, mm)	25	
Volume (packaged, dm3)	0.075 dm3	
Product no.	40571616	
Weight (gross, kg)	0,130	
Weight PAP (kg)	0,000	
Weight PVC (kg)	0,003	
GTIN	4018754020621	
Country of origin AWR	GERMANY	
Region of origin	Nordrhein-Westfalen	
Customs tariff no.	82041100	
Packing standard	10	
Weight (g)	15 g	

Variants.

Product no.	Model No. (ERP)	Description	GTIN
40571616	130a 1/4	Combination spanner Size 1/4 " L.105mm	4018754020621
40571818	130a 9/32	Combination spanner Size 9/32 " L.110mm	4018754020638
40572020	130a 5/16	Combination spanner Size 5/16 " L.115mm	4018754020645
40572222	130a 11/32	Combination spanner Size 11/32 " L.120mm	4018754020652
40572424	130a 3/8	Combination spanner Size 3/8 " L.125mm	4018754020669
40572828	130a 7/16	Combination spanner Size 7/16 " L.135mm	4018754020676
40573232	130a 1/2	Combination spanner Size 1/2 " L.150mm	4018754020683
40573434	130a 9/16	Combination spanner Size 9/16 " L.165mm	4018754020690

GTIN.



STAHLWILLE Eduard Wille GmbH & Co. KG Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0 · Fax: +49 202 4791-393 info@stahlwille.de · www.stahlwille.com © STAHLWILLE Eduard Wille GmbH & Co. KG, Wuppertal