

Torque wrenches Series MANOSKOP®

755

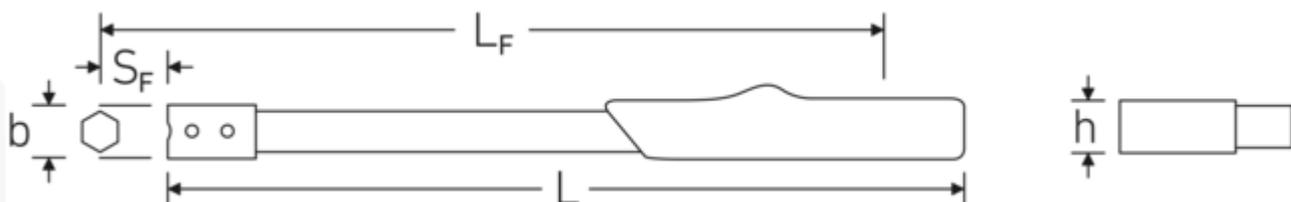


Product no. **50010010**
 GTIN **4018754031627**
 Model **755/10**

Label. MANOSKOP® torque wrench 755 20-100N·m 9 x 12 mm L. 318mm

Properties.

- clicking type with dual stop signal
- for work on assembly lines or for repetitive production tasks.
- no adjustment scale; therefore adjustment with test equipment is required, e.g. with the STAHLWILLE test devices No. 7707 W, SmartCheck or the perfectControl® calibration system No. 7794, or calibration systems No. 7706. 7791)
- with holder for interchangeable insert tools
- particularly slim design
- handle and shaft made of square steel pipe
- Further loading after clicking or loads in the opposite direction of operation (up to the max. measurement range of the torque wrench) do not affect the trigger mechanism, which protects it from damage
- counter-clockwise tightening by turning the insert tool over
- can be supplied pre-set at defined torque value and with certification (additional charge applies)
- **accuracy $\pm 4\%$**

Technical drawing.**Technical attributes.**

Size 10

Logistics data.

Product no. 50010010

Tool holder size [internal square]	9 x 12 mm	GTIN	4018754031627
Measuring range N·m	20-100 N·m	Weight (g)	635 g
Measuring range ft·lb	15-74 ft·lb	Volume (packaged, dm³)	1.120905 dm ³
MA N·m	20 N·m	Packing standard	1
Nominal value N·m	100 N·m	WEEE/ElektroG	nicht ear-pflichtig
Length mm (L)	318 mm	Customs tariff no.	82041100
Width mm (b)	28 mm	Country of origin AWR	GERMANY
Height mm (h)	24 mm	Region of origin	Nordrhein-Westfalen
LF	289 mm	Depth mm (IFS)	320
SF	17,5 mm	Width mm (IFS)	36
		Height mm (IFS)	30
		Weight (gross, kg)	0,775
		Weight PAP (kg)	0,000
		Weight PVC (kg)	0,066
		Length (packaged, mm)	345
		Width (packaged, mm)	57
		Height (packaging, mm)	57

GTIN.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal