

Electronic angle-controlled torque wrenches SENSOTORK®

713R



Product no.	96501606
GTIN	4018754156504
Model	SENSOTORK® 713R/6



Label.

Electronic angle-controlled torque wrench SENSOTORK® 713R 3-60N·m 3/8" L. 378mm

Properties.

- simple and flexible operation thanks to menu guidance on the large display
- particularly broad measurement range (5-100 % of the nominal value)
- includes reversible ratchet No. 735
- with QuickRelease safety lock
- for clockwise and counter-clockwise tightening
- measurement independent of the point of force application
- convenient angle of rotation measurement with an extremely wide angle of rotation range
- units of measurement: N·m, ft·lb, in·lb
- prewarning threshold for visual, tactile and acoustic signals can be set
- multicoloured backlit LED display gives visual cue about the status of the process (traffic light principle)
- extension length compensation function: automatic compensation of the tightening torque when a deviating extension length is entered
- easy to maintain thanks to simple adjustment and automatic notification of the next calibration date
- multiple bolted joints can be combined into a menu-guided sequence
- tightening operations are saved with a date and time stamp
- individual identification designation possible
- password protection against unintentional adjustment and unauthorised access
- compliant with DKD-R 3-7, class 2
- with 2 calibration certificates (torque in accordance with DIN EN ISO 6789-2:2017/ angle of rotation based on VDI/VDE 2648-2)
- in sturdy plastic box (size 40 in sturdy steel box)
- supplied with 2 x 1.5 V AA batteries. NiMH batteries AA/LR6, 1.2 V can also be used.
- fully automatic calibration (torque) with the perfectControl® calibration system No. 7794-2
- readjustment does not require disassembly
- torque and angle of rotation are visible at the same time
- **angle of rotation accuracy $\pm 1^\circ$, ± 1 digit to 100° , $>100^\circ$ at least 1%, ± 1 digit**
- **torque accuracy ± 1 %, ± 1 digit**

Product highlights.



Precision measurement.

Accuracy counts - uncertainty is reduced to a minimum to guarantee accurate readings.



Multisensory.

The torque achieved is indicated by visual, audible and tactile signals - with a multicoloured backlit LCD, acoustic signal and vibration.

Technologies and features.



DIN EN ISO 6789-2


Our torque wrenches and torque screwdrivers are professionally calibrated in accordance with DIN EN ISO 6789-2 and delivered with a corresponding calibration certificate. We also calibrate angle-controlled torque wrenches in accordance with VDI 2648-2. This ensures the accuracy and traceability of our tools.



QuickRelease

The QuickRelease safety lock prevents unintentional loss of insert tools. These click securely into place, and are only released again at the push of a button for a quick tool change. In transducers: The QuickRelease safety lock helps you to quickly mount and change transducers. The transducers lock into the calibration system and only unlock again at the push of the buttons.

Technical drawing.

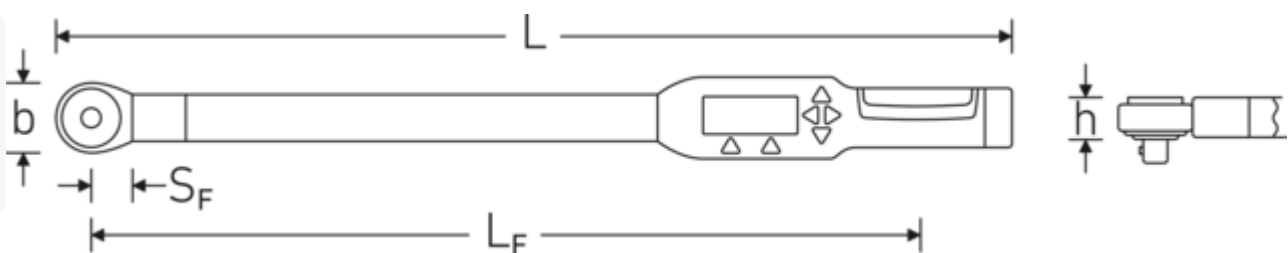

Technical attributes.

Size	6
Anzeigeabweichung	Drehwinkel $\pm 1^\circ \pm 1$ Digit bis 100° , > 100° mindestens $1\% \pm 1$ Digit
Tool holder size [internal square]	9 x 12 mm
Measuring range N·m	3-60 N·m
Measuring range ft·lb	2,5-44 ft·lb
External square drive (inch)	3/8
Length mm (L)	378 mm
Width mm (b)	33 mm
Height mm (h)	24 mm
Number of teeth	60
Battery type	Mignon (AA) 1,5V
DIN	DIN EN ISO 6789-2:2017
LF	299 mm
SF	17,5 mm
Weight with box	1500 g

Logistics data.

Product no.	96501606
GTIN	4018754156504
Weight (g)	856 g
Volume (packaged, dm ³)	3.906 dm ³
Packing standard	1
WEEE/ElektroG	Kleingeräte B2C
Customs tariff no.	82041100
Country of origin AWR	GERMANY
Region of origin	Nordrhein-Westfalen
Depth mm (IFS)	560
Width mm (IFS)	93
Height mm (IFS)	75
Weight (gross, kg)	1,460
Weight PAP (kg)	0,095
Weight PVC (kg)	0,000
Length (packaged, mm)	560
Width (packaged, mm)	93
Height (packaging, mm)	75

Parts list.



81370002
Plastic box, empty

GTIN.




Accessories (for).



81370002
Plastic box, empty



81370002
Plastic box, empty



96585235
SensoMaster software
license

Images.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal