

Torque wrenches Service MANOSKOP®

730R Quick



Product no. **96504040**
GTIN **4018754269525**
Model **730R/40 QUICK**



Label.

Torque wrench Service MANOSKOP® 730R Quick 80-400N·m 3/4" L. 675mm

Properties.

- clicking type with dual stop signal
- no reset to "0" required, as the measuring element is only under load when a force is applied
- mount for interchangeable insert tools
- with QuickRelease safety lock
- Quick adjustment thanks to easy-to-operate locking lever in handle
- non-slip adjuster with thumb recess for quick torque adjustment
- double scale N·m/ft·lb or N·m/in·lb
- also available on request as a N·m only version without dual scale
- counter-clockwise tightening by turning the insert tools over
- clicking mechanism insensitive to continuous loads and counter-loads (up to the max. measurement range of the torque wrench)
- optimal calibration with perfectControl® calibration systems No. 7794 or calibration systems No. 7706, 7791
- easy adjustment without disassembly via 2 external adjustment screws
- with 2-component handle
- calibration certificate in accordance with DIN EN ISO 6789-2:2017
- **accuracy ± 4%**

Product highlights.



Rapid adjustment.


Easy and quick adjustment of the torque is carried out by an easy-to-operate clamping lever in the handle. The scale can be moved quickly and safely with an ergonomically shaped, non-slip adjustment element with thumb recess.



Adjustment does not require disassembly.

Quick adjustment from outside, no disassembly of the torque wrench required, with 2 adjustment points for the maximum & minimum values.



Technologies and features.



Low-wear bending beam system

Our torque wrench is equipped with a low-wear release system with a bending beam. Unlike conventional torque wrenches with coiled springs, the bending beam is not subjected to any load until the tool is in operation, which means that resetting to '0' is not necessary after use.

Technical drawing.

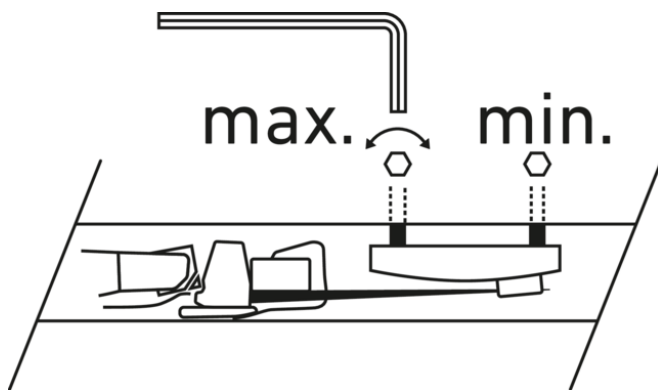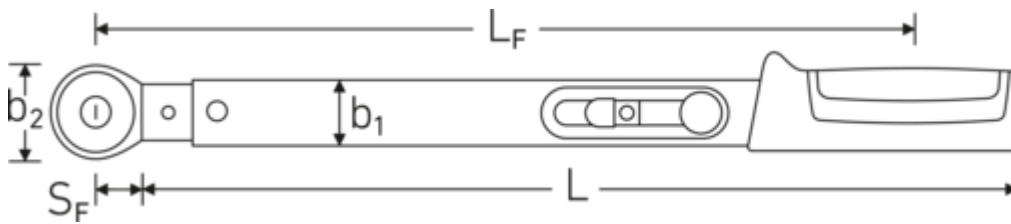

Technical attributes.

Size	40
Anzeigeabweichung	± 4 %
Tool holder size [internal square]	14 x 18 mm

Logistics data.

Product no.	96504040
GTIN	4018754269525
Weight (g)	2694 g
Volume (packaged, dm3)	3.0618 dm3

Measuring range N-m	80-400 N-m	Packing standard	1
Measuring range ft-lb	60-300 ft-lb	WEEE/ElektroG	nicht ear-pflichtig
MA N-m	80 N-m	Customs tariff no.	82041100
Nominal value N-m	400 N-m	Country of origin AWR	GERMANY
Scale division N-m	10 N-m	Region of origin	Nordrhein-Westfalen
External square drive (inch)	3/4	Depth mm (IFS)	675
Length mm (L)	675 mm	Width mm (IFS)	72
b1	72 mm	Height mm (IFS)	63
b2	50 mm	Weight (gross, kg)	2,694
Height mm (h)	63 mm	Weight PAP (kg)	0,185
DIN	DIN EN ISO 6789-2:2017	Weight PVC (kg)	0,000
LF	570 mm	Length (packaged, mm)	675
SF	25 mm	Width (packaged, mm)	72
		Height (packaging, mm)	63

Parts list.



50184040
MANOSKOP® torque
wrench



58250065
Fine-tooth ratchet
insert tool

GTIN.



Images.



STAHLWILLE Eduard Wille GmbH

Lindenallee 27 · 42349 Wuppertal · Germany · Phone: +49 202 4791-0

info@stahlwille.de · www.stahlwille.com

© STAHLWILLE Eduard Wille GmbH, Wuppertal